


SegmentTank ST


Gravimetric Segmented
Tank dispensing machine

TYPICAL FEATURES


- Suitable for batch dispensing as well as in-can tinting.
- Compact construction: 12.000 ltr. (3.170 US gallon) storage capacity incl. dispensing station on a footprint of less than 10 m² (110 sq.ft).
- Maximum of 20 tanks of each 600 ltr. capacity. Different volume combinations available.
- Dispensing by means of gravity or by pumps.
- Recirculation is possible when dispensing by pumps.
- Refilling of the tanks with pumps or through the filling lids on the tops of the tanks.
- Central agitator-drive. Only 1 electromotor necessary for the powering of all the agitators for one segment.
- Executed with a circular (round) or linear type dispensing head depending on the container/can sizes.

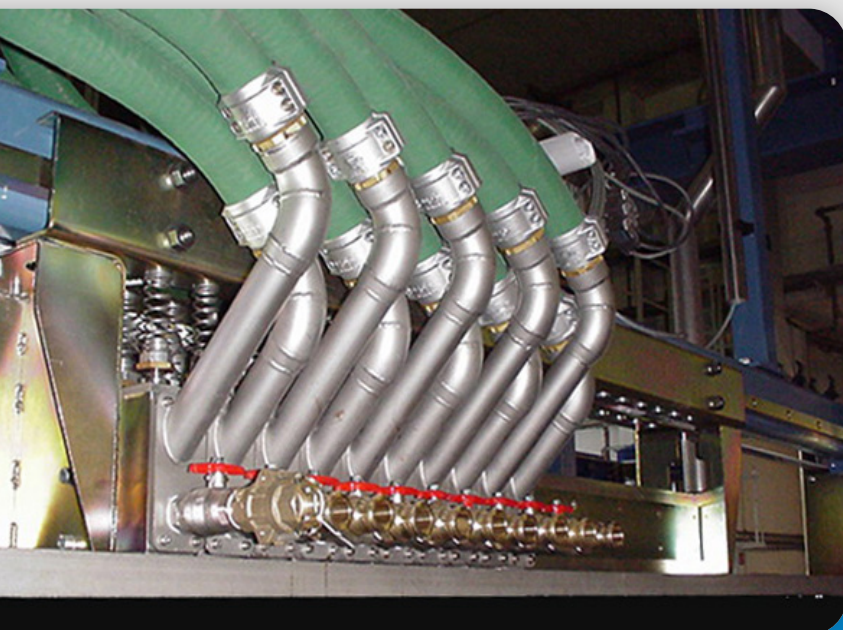


DIFFERENT TANK VOLUME COMBINATIONS




5 x 600 ltr.




1 x 600 ltr.
2 x 1.200 ltr.



2 x 600 ltr.
1 x 1.800 ltr.



1 x 1.200 ltr.
1 x 1.800 ltr.



Storage capacity
12.000 ltr.

2.900 mm



TECHNICAL SPECIFICATIONS

Dimensions :

Ø2.900 mm. H = approx. 4.800 mm (standard execution).

Materials of construction :

All wetted parts made of stainless steel and PTFE. Frame in coated mild steel.

Tanks :

Max. 20 tanks.

Tank content :

From 600 ltr. - 3.000 ltr.

Method of dispensing :

Gravimetrical.

Dispensing weight & accuracy :

Depending on the type of scale.

Dispensing capacity :

Depending on the final execution and product viscosity.

Operation :

PC operated (Windows based).

All capacities mentioned in this brochure are just indications and depend on the type of product being used.